



**LT-50 USER MANUAL AND CARE INSTRUCTIONS**

# User Manual & Care Instructions

---

## Preliminary information

Installation and fitment instructions includes the tools required, fasteners included in the kit, and the hardware included in the kit.

Please follow the instructions and check installation steps with the images in this document.

Alu-Cab recommends that all sealing work is allowed to cure for 24 hours, after which you may drive the vehicle on normal paved roads. Before driving off-road with your Alu-Cab product or operating your roof conversion, an additional cure period of 48 hours is required.

Failure to follow these instructions will void your warranty. Please ensure that you follow the sealant manufacturers curing time as per their technical data sheet.

These times may differ slightly from the times we have recommended.



Service Enquiries email  
[queries@alu-cab.com](mailto:queries@alu-cab.com)

# Care Instructions

---

1. Ensure that all latches are closed properly and split pins are in place before driving.
2. Try to prevent closing the tent when there is condensation build up on the canvas.  
In the case of needing to pack up in the rain, air the tent out as soon as possible to avoid mold and mildew build up.
3. If possible, avoid leaving bedding in the tent over prolonged periods of time.
4. Inspect all mounting brackets regularly to ensure that your tent is secure.
5. Inspect the sealing rubber regularly to ensure that the tent is sealed properly.
6. Wash mattress cover regularly.

# Opening

---

STEP  
1

In the event of adverse weather conditions, park the vehicle with the nose facing into the wind.

STEP  
2

Loosen the two catches on the base of the tent.

STEP  
3

Now push the handle upwards until you feel the shocks take over.



# Opening

---

STEP  
4

Remove the Ladder from the ladder bag and insert the antiluce clip through the larger hole on the ladder bracket fitted to the tent.

STEP  
5

Lock the antiluce clip in place.



# Opening

---

STEP  
6

Extend the ladder until it touches the floor, trying to keep the ladder as straight up as possible.

Please note that if you are accessing the tent from the rear and your vehicle has a tailgate, ensure that the tailgate is closed when using the ladder.


STEP  
7

Pull the elastic cord downwards and position around the base of the tent.



# Opening

---

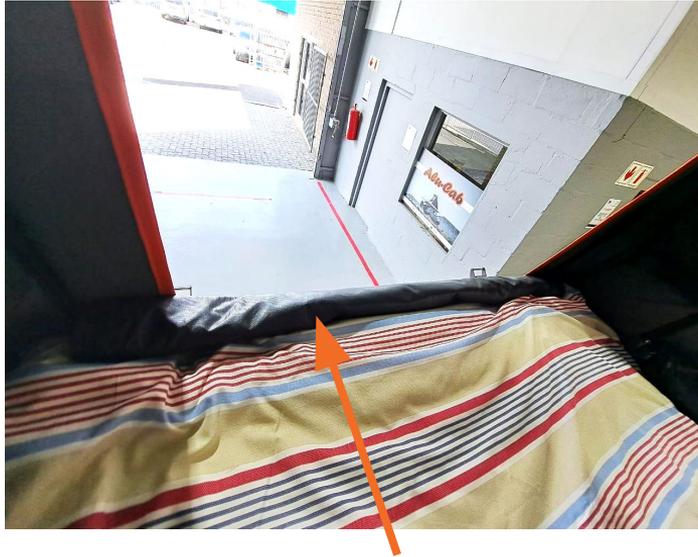

# Closing

---

STEP  
8

When packing the bedding away, ensure that the pillows are stowed as far forward in the tent as possible

STEP  
9

Pack the bedding evenly across the mattress.

STEP  
10

Fold the window canvas into the tent as seen above.



# Closing

---

STEP  
11

Place the elastic cord in the center of the canvas.

STEP  
12

Pull the tent lid down using the pull strap

STEP  
13

Tuck all excess canvas inside the tent before closing the tent completely.



# Closing

---

STEP  
14

Close the two locking catches on the base of the tent.



# Closing

---

STEP  
15


Unlock antiluce catch and slide the ladder out.

STEP  
16

Drop the ladder down step by step until fully compressed.

STEP  
17

Stow the ladder and your tent closing is now complete.

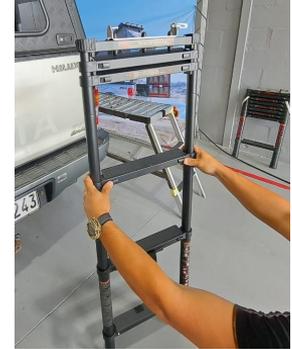

# Disclaimer

---

All rights reserved. No part of this website may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the owner.

## **Review all instructions information carefully before installation.**

Any damages, direct or incidental to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various applications and fitment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip.

If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.

## **WARNING**

Always wear appropriate PPE (Personal protection equipment) when fitting our products. Although the mounting kit is designed to be DIY, if you have any doubts or concerns, contact an accredited fitment centre to carry out the work. Alu-Cab will not be liable for any injury to persons, and/or damage to products and/or vehicles.

While Alu-Cab Holdings takes reasonable measures to ensure that the contents of this Website are accurate and complete, Alu-Cab Holdings makes no representations or warranties, whether express or implied, as to the quality, timeliness, operation, integrity, availability or functionality of this Website or as to the accuracy, completeness or reliability of any information on this Website. Alu-Cab Holdings reserves the right to make changes, corrections and/or improvements to the information and to the products and programs described in such information, at any time without notice.

Alu-Cab Holdings will use reasonable endeavours to maintain the availability of the Website, except during scheduled maintenance periods, and reserves the right to discontinue providing the Website or the service or any part thereof with or without notice to you. Any person who accesses this Website or relies on this Website or on the information contained in this Website does so at his or her own risk.

Occasionally, at our discretion, we may include or offer third-party products or services on our website. These third-party sites have separate and independent privacy policies. We therefore have no responsibility or liability for the content and activities of these linked sites. Nonetheless, we seek to protect the integrity of our site and welcome any feedback about these sites.